




Part Number
M27

TECHNICAL SPECIFICATION

Description	CCA	Amphere Hour	Reserve Capacity	Dimension mm - kg				Terminal	Battery Assembly	Warranty (Months)
	-18°C (0°F)	20 Hr	Mins	Length	Width	Height Battery	Weight			
M27/N70ZZ	730	-	160	306	168	227	22	A	D	24

TECHNICAL DRAWING

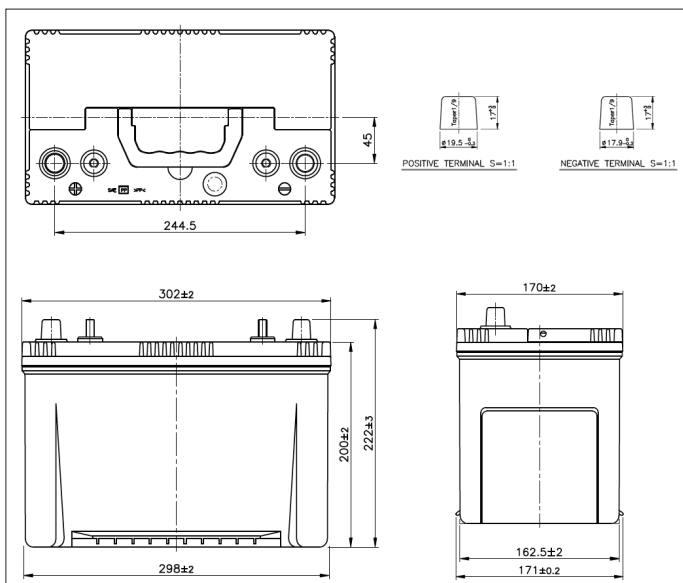

PRODUCT FEATURES

- Sealed Maintenance Free Calcium/Calcium design - no need to add water.
- Low Resistance Envelope Separators to improve vibration durability and prevent internal shorting between the positive and negative plates.
- Patented liquid gas separators which enhance the Maintenance Free characteristics of the battery by preventing electrolyte loss through a process of collection and return of electrolyte to the reservoir.
- Centred cast on plate straps and wrought Lead - Calcium grids add to the vibration resistant battery design whilst minimising gas and water usage and achieving less self discharge.
- Inbuilt ceramic disc flame arrestors to protect against accidental battery explosion from an external spark.
- In built 'Magic Eye' hydrometer to enable visual checking of battery state of charge.
- High cranking performance to suit modern engine starting needs.
- Fold away carry handles to allow ease of portability and placement into the battery box or operating area.

Hi-Tec Batteries Pty Ltd.

5 Tarlington Place, Smithfield NSW 2164.

www.hi-tecbatteries.com.au Phone: 1300 796 009