


## NPL12-200SL

Neutron Power (12.8V) LiFePO<sub>4</sub> (LFP) slimline series batteries are light weight and ultra-thin design for UTE, 4WD and Marine applications.

The prismatic LFP cells are intrinsically more reliable, powerful and have a longer cycle life than its AGM counterparts. The added built-in BMS enables the battery further protection and performance as it constantly analyses the voltage, temperature, and finer cell balancing.

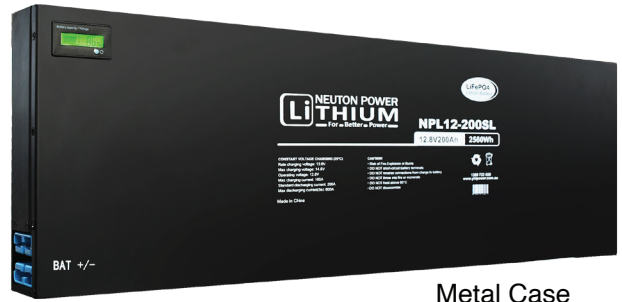


Metal Case

### Features

- Made from eco-friendly materials
- Construction of high-quality prismatic cells
- Currently the safest lithium technology in the market
- Excellent resistance against harsh conditions and abuse
- Less than 3% self-discharge per month
- Maintenance-free and modular
- Up to 60% weight saving compared to its AGM counterparts
- LCD screen for SOC display
- Built-in safety protections
- 5 Years warranty
- Design life of up to 15-20 years

### Size

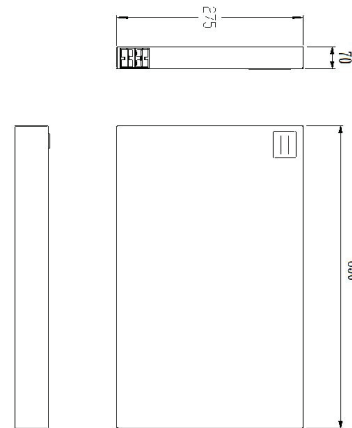


### Specification


Voltage Range(V)	9.2~14.6	Life Cycle (0.5C/0.25C,80%DOD @ 25°C)	Approx 4000
Cell	3.2V200Ah	Short-circuit Current( < 10ms)	Approx.2500A
Cell Series&Parallels	4S1P	Dimension ( L*W*T )	(850*275*70)mm
Rated Voltage(V)	12.8	Total Weight (Kg)	Approx.28
Rated Capacity(Ah)	200	Internal Resistance (Fully charged @ 25°C)	≤5 mΩ
Rated Energy(KWh)	2.56	Thermal Management	Convection cooling
Maximum Charge Current(A)	200	Operating Temperature Charge	0~50°C
Maximum Discharge Current(A)	200	Operating Temperature Discharge	-20~65°C
Pulse Current(A)(≤5s)	600	Operating Humidity	60±25% R.H.
End of Discharge Voltage(V)	11.2		
Recommended Charge Voltage(V)	13.6~13.8		

## Characteristics Curve


Discharge Performance at 25°C

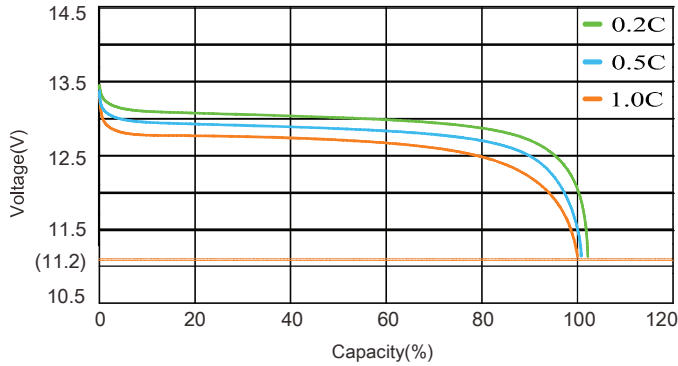


Charge and Discharge at 25°C, 0.5C

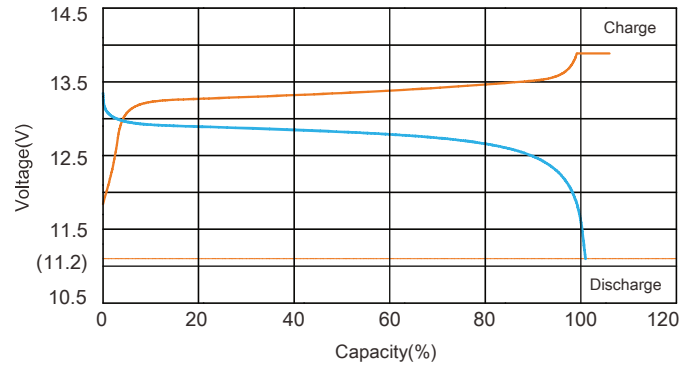

Temperature Effects on Capacity at 0.5C

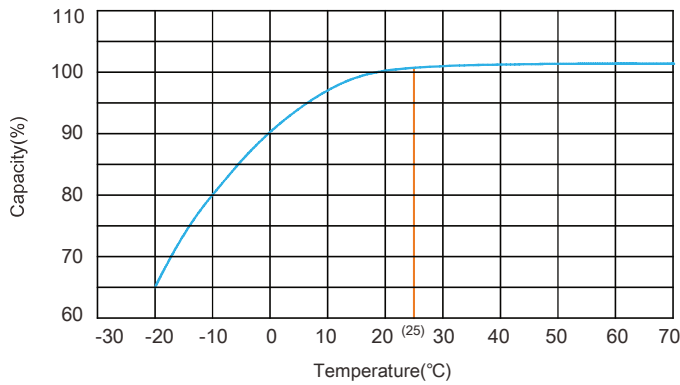

Cycle Life with DOD at 25°C  
0.5C Discharge and 0.25C Charge

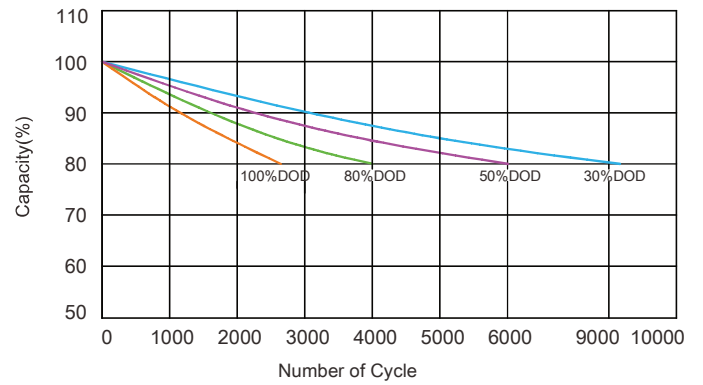

## MECHANICAL SPECIFICATIONS

Case Material	SPCC
Cell Type-Chemistry	Prismatic LiFePO4
Terminal Type	2*175 Anderson
IP Grade	IP2X

## BMS CHARACTERISTICS

Recommended Charge Current	< 100A
Maximum Charge Current	200A
Maximum Continuous Discharge Current	200A
Recommended Charge Voltage	13.6V-13.8V
Max Charge Voltage	14.6V
Over Charge Protection Voltage Range	14.8-15.2V
Charge Mode	CC/CV
Over Discharge Protection Voltage Range	8.4-10V

## Performance Data

Time(min)	60	120	180	240	360	480
Constant Power(kw)	2.56	1.28	0.85	0.64	0.42	0.30
Constant Current(A)	200	100	66.6	50	33.3	25



**Hi-Tec**  
**Batteries**

**Hi-Tec Batteries Pty Ltd.**

5 Tarlington Place, Smithfield NSW 2164.

[www.hi-tecbatteries.com.au](http://www.hi-tecbatteries.com.au) Phone: 1300 796 009